



# Mecca Basin/bath Spout Only



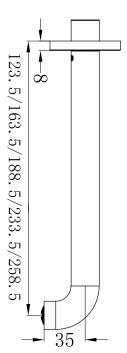

Dimensions are nominal measurements only.

### **SPECIFICATION**

WELS RATING 5STAR 5L/MIN

WATERMARK LICENSE WM-060073

TEMPERATURE RATING MIN 1°C-MAX 75°C

PRESSURE RATING MIN 150KPa-MAX 500KPa

### FINISH AND SKU

	CHROME	NR221903C (120/160/185/230/260)CH
	MATTE BLACK	NR221903C (120/160/185/230/260)MB
	BRUSHED NICKEL	NR221903C (120/160/185/230/260)BN
	GUN METAL	NR221903C (120/160/185/230/260)GM
	BRUSHED GOLD	NR221903C (120/160/185/230/260)BG
	BRUSHED BRONZE	NR221903C (120/160/185/230/260)BZ
	MATTE WHITE	NR221903C (120/160/185/230/260)MW
N	GRAPHITE	NR221903C (120/160/185/230/260)GR

## MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water.

Do not use cream cleaners or citrus based cleaning products, as they are abrasive.

Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty

### PACKING INCLUDES

- 1x spout
- 1x plate










## **Installation Instruction**




#### STEP 1:

Cut off the G1/2 outlet thread to flush with the finished wall surface.



#### STEP 2

Turn the G1/2 spout adapter onto the outlet thread, and ensure to place the rubber washer inside, as shown in the figure.

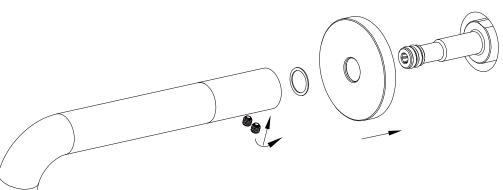

#### STEP3

- o Fit the back plate onto the spout adapter.
- o Place the ABS washer against the backplate.
- o Push in the spout onto spout adapter, tighten two grub screws firmly on the underside of the spout with the Allen key. (Don't over tighten)